



FRM220-10/100i

10/100Base-TX to 100Base-FX In-Band Managed Converter

The FRM220-10/100i is a 10/100Base Ethernet to 100Base-FX fiber slide-in card converter designed for central and remote applications. With advanced features like bandwidth control, this media converter is targeted for customer premises equipment in metro LAN, campus, enterprise and FTTx applications. By offering in-band management, this converter can be completely controlled and monitored from a centrally located managed rack controlling all converter settings including bandwidth control, duplex, and speed configuration. This media converter is completely transparent to Layer 2 and Layer 3 protocols including IEEE 802.1q, VLAN tag, Q in Q, STP, IPX, IP, etc.

Features


- 1-Port 10/100Base-TX to 100Base-FX Converter
- Auto-Negotiation or forced mode
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports Loop Back Test
- Supports RMON counter
- Auto Laser Shutdown (ALS)
- Auto MDI/MDIX
- Forward 2046 bytes (max.) packets in switch mode
- Forward 9K jumbo packets in converter mode
- Supports Q in Q double tagged frame transparent
- Supports IEEE 802.1q Tag VLAN pass thru
- Supports local / remote In-band management (Monitor and Configure) by the SNMP manager.
- Bandwidth control (Nx32Kbps or Nx512Kbps)
- Supports IEEE 802.3x flow control (Pause)
- Fiber Hardware Reset (FHR)
- Online local / remote f/w upgrade

Specifications

| Optical Interface | Connector | 1x9 (SC, ST, FC) |
|----------------------|-------------|--|
| | Data rate | 125Mbps |
| | Duplex mode | Full duplex |
| | Fiber | MM 50/125µm, 62.5/125µm SM 9/125µm |
| | Distance | MM 2km, SM 15/30/50km WDM 20/40km |
| | Wavelength | MM 1310nm, SM 1310, 1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B) |
| Electrical Interface | Connector | RJ45 |
| | Data rate | 10Mbps, 100Mbps |
| | Duplex mode | Half / Full duplex |
| | Cable | 10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher |

| | |
|--------------------------|---|
| Standards | IEEE 802.3, IEEE 802.3u, TS-1000 |
| Indications | LED (Power, FEF, FX-Link, TX-SPD, TX-Duplex, TX-Link) |
| Power Input | 12VDC |
| Power Consumption | < 6W |
| Dimensions | 155 x 88 x 23mm (D x W x H) |
| Weight | 120g |
| Temperature | 0 ~ 50°C (Operating), -10 ~ 70°C (Storage) |
| Humidity | 10 ~ 90% non-condensing |
| Certification | CE, FCC, RoHS compliant |
| MTBF | 65,000 hrs |

Application

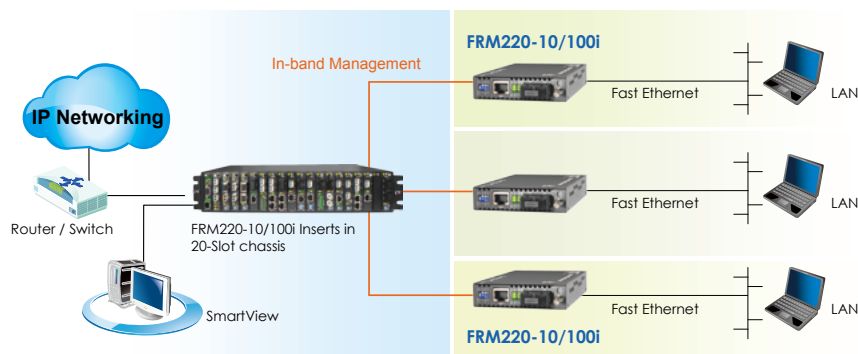

Ordering Information

| Model Name | Description |
|----------------|---|
| FRM220-10/100i | 10/100Base-TX to 100Base-FX In-band managed converter |
| Connector Type | Connectivity Distance |
| SC, ST, FC | 002: 2km 015: 15km 030: 30km 050: 50km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type |

Connector Type Connectivity Distance
FRM220 - 10/100i -
 Example: FRM220 - 10/100i - SC002

Note: This card must use CH01M, with serial console, to configure standalone settings.
 When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.