

38 MM STAINLESS STEEL TRACKBALL UNIT

Vandalproof, IP65 sealed



This range of compact trackball units is highly ruggedized and designed for harsh industrial applications, kiosk consoles, navigation controls, etc... They feature a robust, vandalproof construction and all metal look : the carrier plate made of brushed stainless steel, a stainless steel ring protecting the trackball sealing and anti-vandal stainless steel IP65 sealed switches.

The 38mm trackball unit can either have :

- a black phenolic resin ball for highest resistance to hostile impacts and to scratches : Type TBS38F2
- a stainless steel ball for styling and complete stainless steel appearance : Type SBS38F2

GENERAL TECHNICAL SPECIFICATIONS

| | |
|------------------------------|--|
| Sealing | : IP65 static |
| Carrier plate | : brushed stainless steel |
| Ball diameter | : 38,1 mm |
| Ball material | : phenolic resin (TBS38F2) / stainless steel (SBS38F2) |
| Dimensions | : 100 x 78 x 40 mm |
| Weight | : 0,4 kg / 0,6 kg |
| Lifetime | : >= 2 million ball revolutions |
| Tracking force | : nom. 50 grams (TBS38F2)/nom. 65 grams (SBS38F2) |
| Output | : PS/2 & USB Combo |
| Cable | : 1 shielded, straight 1,6 m long |
| Operating temperature range: | -10°C to +60°C |
| Storage temperature range | : -25°C to +80°C |

Push button switches

| | |
|-----------------------|----------------------------|
| Sealing | : IP65 |
| Material | : stainless steel, brushed |
| Mechanical life | : 1 mil. cycles min |
| Contacts | : gold plated |
| Travel | : 1,3mm |
| Operating force | : 4N typ |
| Operating temperature | : -20°C to +60°C |

CE

Compliant to EMC Directive 89/336/EEC for Electromagnetic Compatibility.
Low Voltage Directive 73/23/EEC not applicable for our trackballs.

CONNECTIVITY

These combo PS/2 & USB trackball units have a 1,6 meter long shielded straight cable ended by a USB type A plug.

An adaptor to PS/2 is added. No special device driver is needed, use standard available drivers of your operating system.

* Due to the increasing differences of the PS/2 mouse port specifications of the various PC manufacturers, we do recommend that this unit should be tested on the final PC configuration and operating system prior to installing it in series.

ORDER INFO

TBS38F2 Black phenolic resin ball


SBS38F2 Stainless steel ball

Output : PS/2 & USB Combo



38 MM STAINLESS STEEL TRACKBALL UNIT
Vandalproof, IP65 sealed

DIMENSIONAL DRAWING

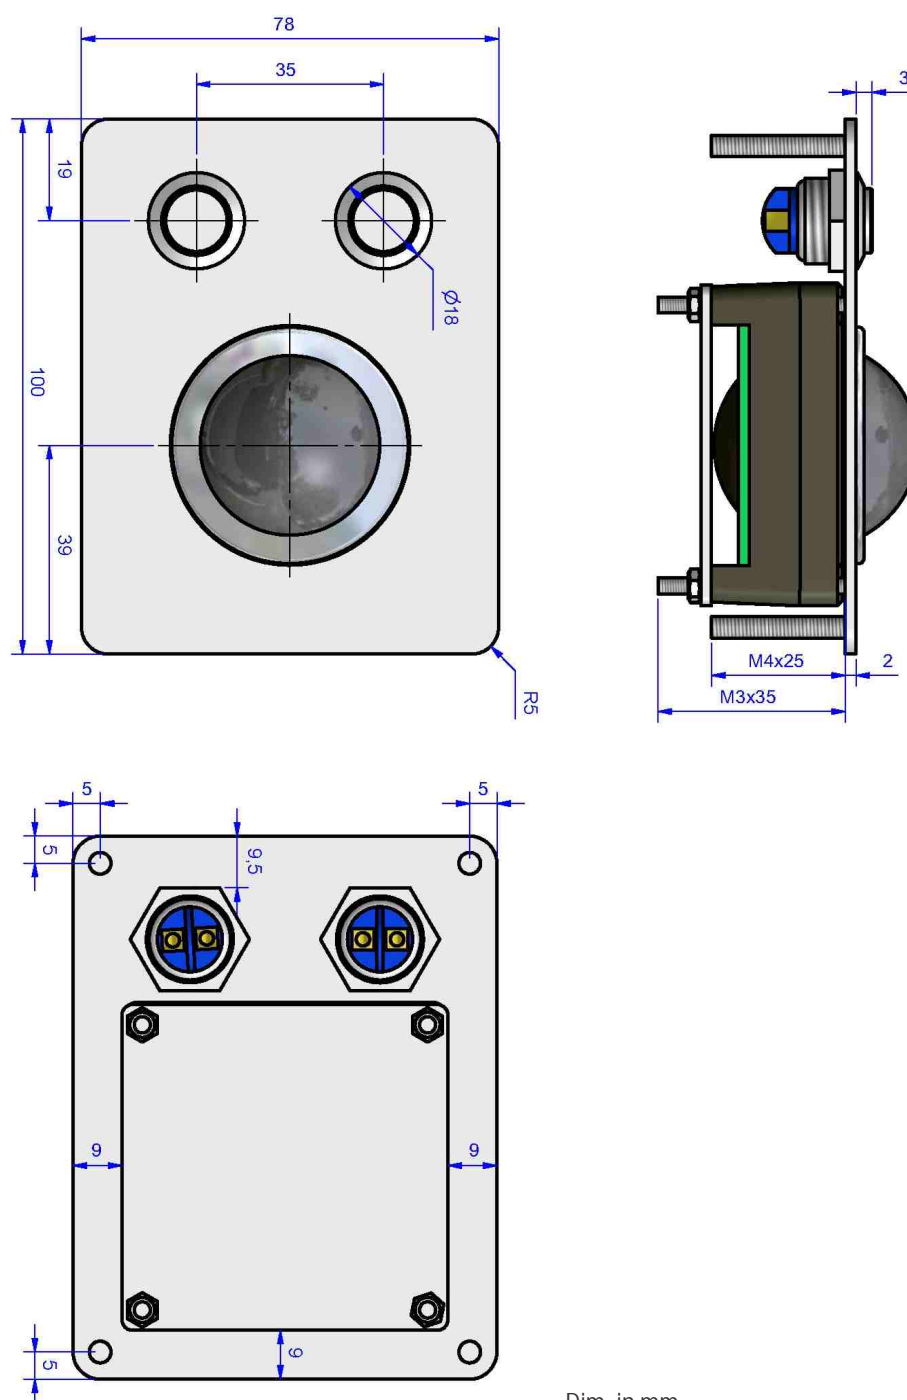

The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.