

# IS-DS5150 (Preliminary)

Tiny Serial-to-Ethernet Device Server



The IS-DS5150 is a series of Serial-to-Ethernet device servers designed to add Ethernet and Internet connectivity to any RS-232 and RS-422/485 device, and to eliminate the cable length limitation of legacy serial communication. By using the Utility, the built-in COM port of the IS-DS5150 series can be virtualized to a standard PC COM port in Windows. Therefore, users can transparently access or monitor serial devices over the Internet/Ethernet without software modification.



## Key features

- ▶ Incorporates any RS-232/422/485 serial device in Ethernet
- ▶ Application Modes: Virtual COM, TCP Server, TCP Client
- ▶ Virtual COM for 32/64-bit Windows XP/2003/2012/7/8/10
- ▶ Data Packing Modes: Length, Delimiter, timeout, Char-timeout
- ▶ Supports pair-connection (serial-bridge, serial-tunnel) Applications
- ▶ Supports UDP responder for device discovery (UDP Search)
- ▶ Static IP or DHCP network configuration
- ▶ Easy firmware update via the Ethernet (BOOTP, TFTP)
- ▶ Tiny Web server for serial and network configuration (HTTP)
- ▶ Contains a 32-bit MCU that efficiently handles network traffic
- ▶ 10/100 Base-TX Ethernet, RJ-45 x 1 (Auto-negotiating, auto MDI/MDIX, LED Indicators)
- ▶ Redundant power inputs: PoE and DC jack
- ▶ Allows automatic RS-485 direction control
- ▶ 3000 VDC isolation and +/-4 kV ESD protection
- ▶ Male DB-9 or terminal block connector for easy wiring
- ▶ Tiny form-factor and low power consumption
- ▶ Cost-effective device servers
- ▶ 12~48 VDC power input
- ▶ -25~75°C operating temperature

## Specification

### System

CPU	32-bit ARM
-----	------------

### Communication Interface

Ethernet	10/100 Base-TX, 8-pin RJ-45 x 1 (Auto-negotiating, Auto-MDI/MDIX, LED indicator), PoE (IEEE 802.3af, Class 1)	
COM	3-wire RS-232, 2-wire RS-485, 4-wire RS-422	
Self-Tuner	Yes, automatic RS-485 direction control	
RS-485	Bias Resistor	Yes, 1 K $\Omega$
	Node	254 (max.)
UART	16c550 or compatible	
Isolation	3000 VDC	
ESD Protection	+/-4 kV	

### COM Port Format

Baud Rate	115200 bps Max.
Data Bit	5, 6, 7, 8
Parity	None, Odd, Even, Mark, Space
Stop Bit	1, 2

### Power

Power Input	PoE: IEEE 802.3af, Class 1 DC jack: +12 ~ 48 VDC
Power Consumption	0.07 A @ 24 VDC

## Mechanism

Connector	10-Pin Removable Terminal Block x 1
Mounting	DIN-Rail
Case	Metal

## Software

Configuration Options	Web, Windows Utility
Virtual COM Driver/Utility	Windows XP/2003/2012/7/8/10

## Physical Characteristics

Housing	SECC (0.8 mm)
Weight	150 g (TBD)
Dimensions	52 (D) x 26 (W) x 77.5 (H) mm


## Environmental Limits

Operating Temperature	-25 to 75°C
Storage Temperature	-30 to 80°C
Ambient Relative Humidity	5 to 95% (non-condensing)

## Standards and Certifications

Vibration, shock, free fall	IEC-60068-2-6, -27, -32
Certification Compliance	CE, FCC
Electrical Safety	CE, UL 60950-1, CSA C22.2 No. 60950-1, EN 60950-1
EMC	FCC Part 15, CISPR 22 (EN55022) Class A IEC-61000-4-2, -3, -4, -5, -6 (Level 3)
RoHS & WEEE	RoHS (Pb free) and WEEE Compliant
MTBF	>25 years

## Dimension Diagram

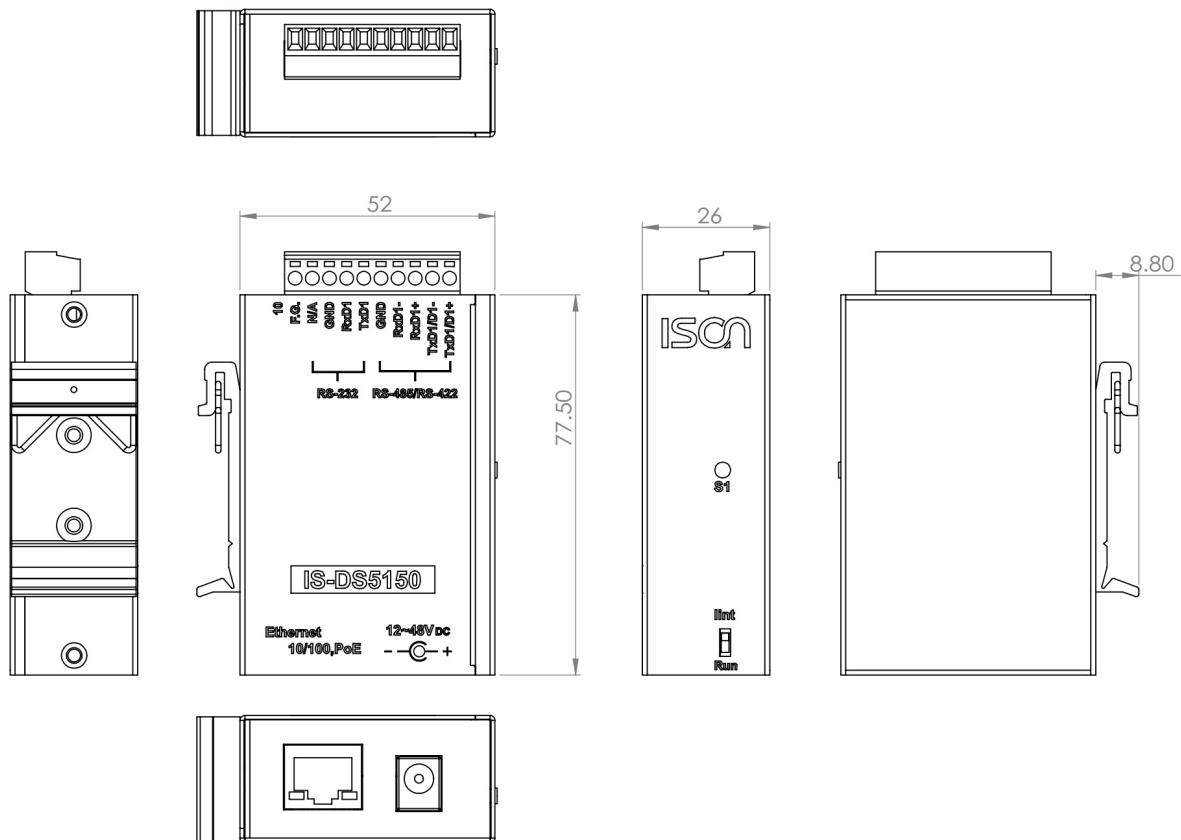

## Ordering Information

Available Models	Description	100Mb FX
IS-DS5150	Industrial Tiny Serial-to-Ethernet Device Server, -25~75°C	1

## Accessories

None

## Package Checklist

1. IS-DS5150
2. DIN-Rail kit
3. Quick Installation Guide (Printed)